


## Features

- ★ Low cost
- ★ With built in capacitor
- ★ Small size
- ★ High frequency range

## Applications


- ★ Consumer electronics




## Specifications (Characteristics)

Item	Specifications
Frequency Range	20MHz~60MHz
Frequency Accuracy	±0.5%
Temperature Stability at -25°C ~ +85°C	±0.2%
Internal Capacitance	C1 : C2 15pF(20.1~25.99MHz) 5pF(26.0~60.0MHz)
Aging for 10 years	±0.2%
Applicable IC	1/6 TC74HC04P x 2
Package	3000pcs / reel


## Dimension (Unit : mm)

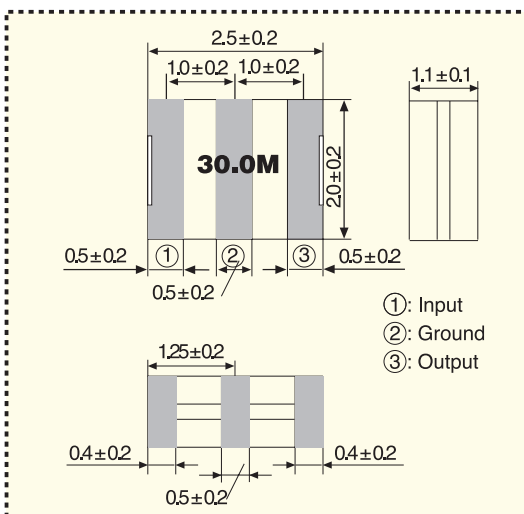


## Recommended Land Pattern

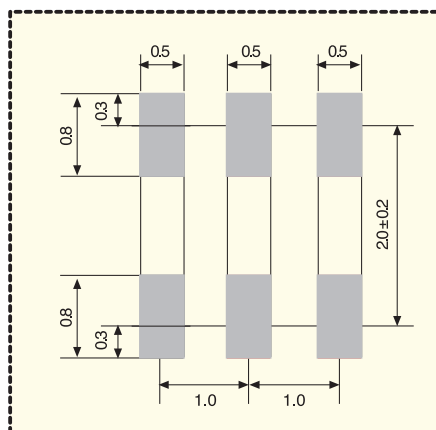

## Test Circuit

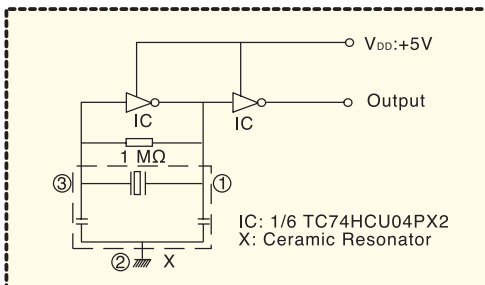

## Recommended Reflow Soldering

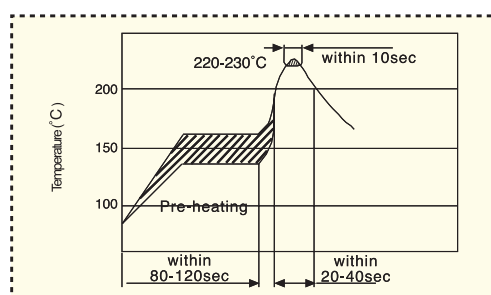

## Ordering Code

Part Number Code	Holder Type + Frequency + Design Mode
Ordering Code	Same as Above
Example	ZTTCW30.0MX